



DSLC-2™ Digital Synchronizer and Load Control

DESCRIPTION

Woodward blended the original solid DSLC™ with another decade of application experiences in developing the new DSLC-2™. The DSLC-2™ excels in either simple generator or complex generator system applications. The DSLC-2™/MSLC-2™ combination provides multiple unit, segment, utility and intertie breaker control for complex power systems.

The Woodward DSLC-2™ control is a microprocessor-based synchronizer and load control designed for use on three-phase AC generators. The DSLC-2™ control combines synchronizer, load sensor, load control, dead bus closing system, VAR, power factor and process control, all integrated into one powerful package. Applications allow up to 32 generators to be precisely paralleled and controlled. A dedicated Ethernet system provides seamless communications between DSLC-2™ and MSLC-2™ units. A second Ethernet port is provided for customer remote control and monitoring capability using Modbus TCP allowing easy DCS and PLC interfacing. Modbus RTU is available through a separate RS-485 port.

Slip frequency or phase matching automatic synchronizing with or without dead bus closing is selectable.

The DSLC-2™ control senses true RMS power and provides soft bump-less loading and unloading functions. It can either base load or set import/export/process power levels against the utility, or accurately share loads on isolated, multiple generator systems.

VAR and power factor control flexibility allows you to either provide a set level of VARs to the utility or to maintain a constant power factor for reliable operation. The VAR/PF control also shares kVARs in an isolated systems, maintaining proportional reactive loads (kVARs) on all machines more accurately than droop or cross-current voltage systems.

FEATURES

- Dedicated Ethernet line for precise system communications between all DSLC-2's™ and MSLC-2's™ significantly reduces system wiring.
- Ethernet Modbus TCP for remote control and monitoring.
- Flexible hardware allows the new DSLC-2™ to be used in different applications which previously would have required one of 12 separate DSLC™ part numbers.
- Integrated DSLC-2™ and MSLC-2™ system functionality eliminates the need for redundant sensors (like PTs, CTs, and MOPs) that connect to individual modules such as the load sensors and synchronizers.
- Back panel mounting and a reduced size frees up door space and provides easy wiring.
- Eliminates the need for additional relay logic to control dead bus closing.
- Slip frequency paralleling, voltage matching, and speed bias transfer between the synchronizer and load control result in smooth paralleling without the risk of reverse power trips.
- Three-phase true RMS power sensing makes the DSLC-2™ control accurate even with unbalanced phase loading and voltage fluctuations.
- The Woodward ToolKit™ software allows flexible setup using the same basic menu tree as the original DSLC™ plus an overview screen. No hand held programmer is required. Graphical overview of generator and bus bar parameters with trending makes the DSLC-2™ commissioning friendly.


- Applications for up to 32 generators using 32 DSLC-2™ and up to 16 MSLC-2™ controls.
- Complex applications with up to 8 bus segments
- Four communication ports
- Ethernet A port for unit to unit communications
- Ethernet B port for remote control monitoring via Modbus TCP
- RS-485 port for remote control via Modbus RTU
- RS-232 port for configuration of device using Woodward ToolKit software
- Automatic generator soft loading and unloading for bump-less load transfer
- Isochronous load sharing with other DSLC-2™ equipped sets
- Process control
- VAR or Power Factor control
- Dead bus closing
- PLC & DCS compatible
- One part number is adjustable for multiple speed controls, voltage regulators, and potential transformer configurations
- Application range up to 999 MW
- Not compatible with original DSLC™
- UL/cUL & CE Listed

SPECIFICATIONS


Power supply	12/24 Vdc (8 to 40 Vdc)	Power	
Intrinsic consumption	max. 15 W	Setting range	0.5 to 99,999.9 kW/kvar
Ambient temperature (operation)	-40°C to 70°C / -40 to 158°F	Discrete inputs	isolated
Ambient temperature (storage)	-40°C to 85°C / -40 to 185°F	Input range	12/24 Vdc (8 to 40 Vdc)
Ambient humidity	95 %, non-condensing	Input resistance	approx. 20 kOhms
Voltage	(λ/Δ)	Relay outputs	potential free
120 Vac [1]	Rated (V_{rated}) 69/120 Vac	Contact material	AgCdO
	Max. value (V_{max}) 86/150 Vac	Load (GP)	2.00 Aac@250 Vac
	Rated voltage phase - ground 150 Vac		2.00 Adc@24 Vdc / 0.36 Adc@125 Vdc / 0.18 Adc@250 Vdc
	Rated surge volt. (V_{surge}) 2.5 kV	Pilot duty (PD)	
and 480 Vac [4]	Rated (V_{rated}) 277/480 Vac		1.00 Adc@24 Vdc / 0.22 Adc@125 Vdc / 0.10 Adc@250 Vdc
	Max. value (V_{max}) 346/600 Vac	Analog inputs (none isolated)	freely scaleable
	Rated voltage phase - ground 300 Vac	Type	0 to 10 V / 0 to 20 mA
	Rated surge volt. (V_{surge}) 4.0 kV	Resolution	11 Bit
Accuracy	Class 0.5	Analog outputs (isolated)	freely scaleable
Measurable alternator windings	3p-3w, 3p-4w, 3p-4w OD	Type	$\pm 10\text{ V}$ / $\pm 20\text{ mA}$ / PWM
Setting range	primary 50 to 650,000 Vac	Insulation voltage (continuously)	100 Vac
Linear measuring range	$1.25 \times V_{rated}$	Insulation test voltage (1s)	500 Vac
Measuring frequency	50/60 Hz (40 to 85 Hz)	Resolution	11/12 Bit (depending on analog output)
High Impedance Input; Resistance per path	[1] 0.498 M Ω , [4] 2.0 M Ω	$\pm 10\text{ V}$ (scaleable)	internal resistance approx. 500 Ohms
Max. power consumption per path	< 0.15 W	$\pm 20\text{ mA}$ (scaleable)	maximum load 500 Ohms
Current (Isolated)	Rated (I_{rated}) [1] ..1 A or [5] ..5 A	Housing	Switch cabinet back mounting ..Sheet metal housing
Linear measuring range	$I_{gen} = 3.0 \times I_{rated}$	Dimensions	WxHxD ..250 x 227 x 84 mm (9.84 x 9.00 x 3.30 in)
	$I_{mains/ground} = 1.5 \times I_{rated}$	Connection	screw/plug terminals 2.5 mm ²
Setting range	1 to 32,000 A	Protection system	IP 20
Burden	< 0.15 VA	Weight	approx. 1,900 g (4.2 lbs)
Rated short-time current (1 s)	[1] 50 x I_{rated} , [5] 10 x I_{rated}	Disturbance test (CE)	tested according to applicable EN guidelines
Accuracy	Class 0.5	Listings	UL, cUL, GOST-R, CSA
		Marine	LR (Type Approval), ABS (Design Assessment)

DIMENSIONS


Sheet metal housing for cabinet mounting

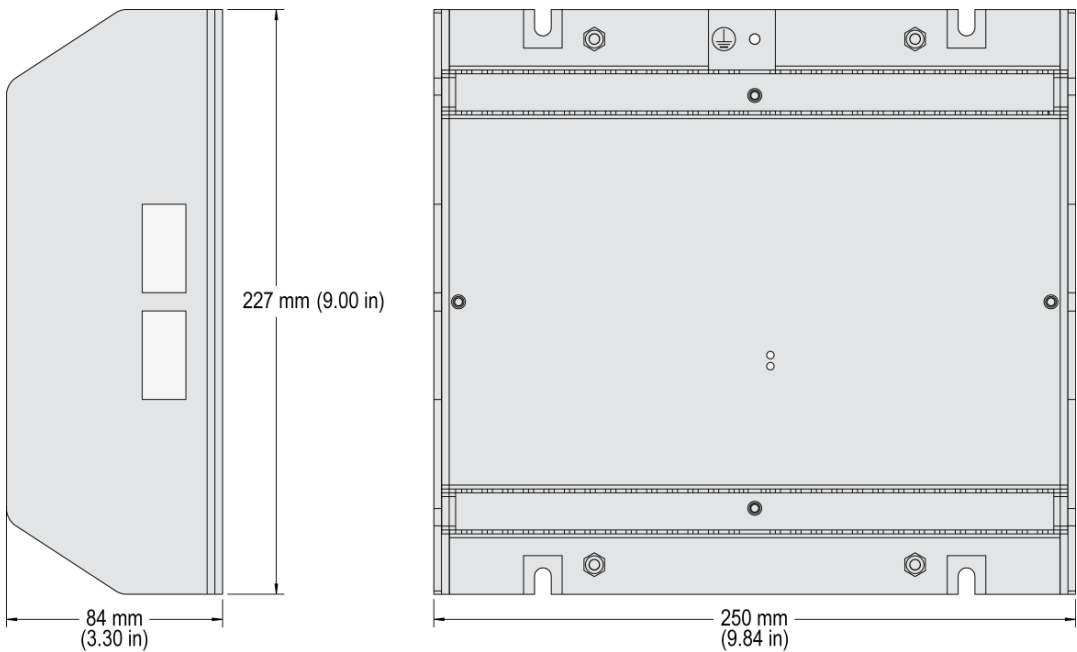

TERMINAL DIAGRAM

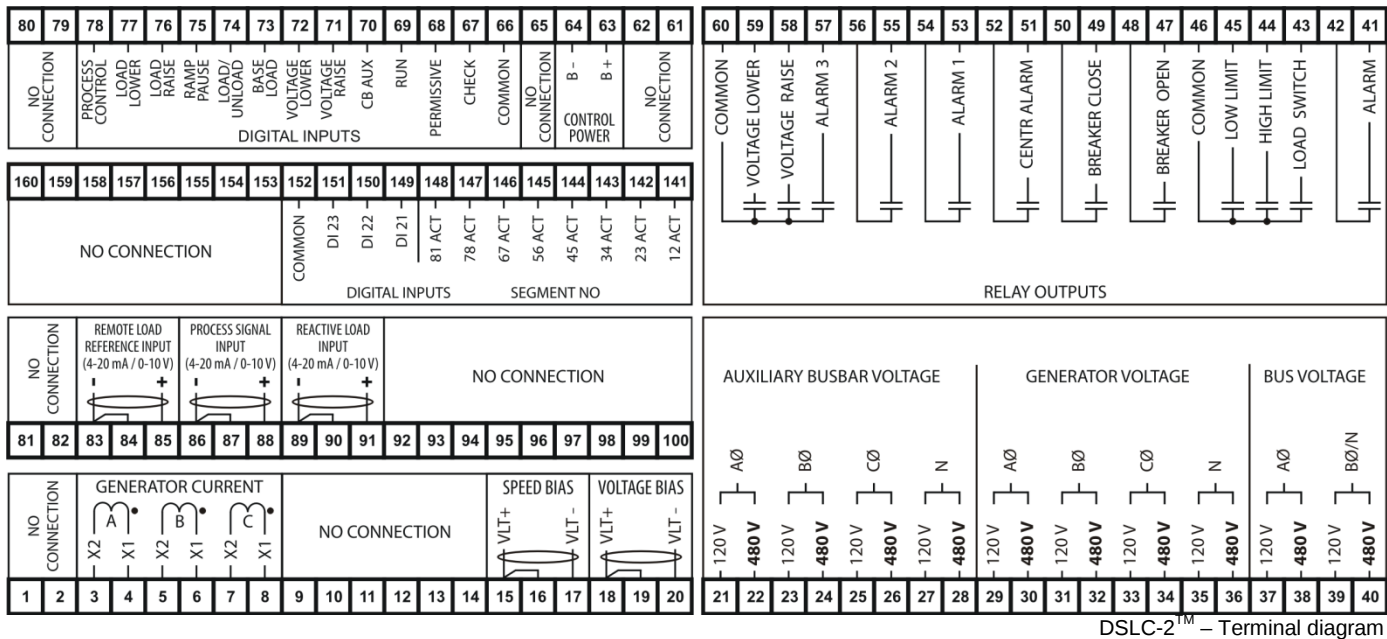

TYPICAL CONFIGURATION

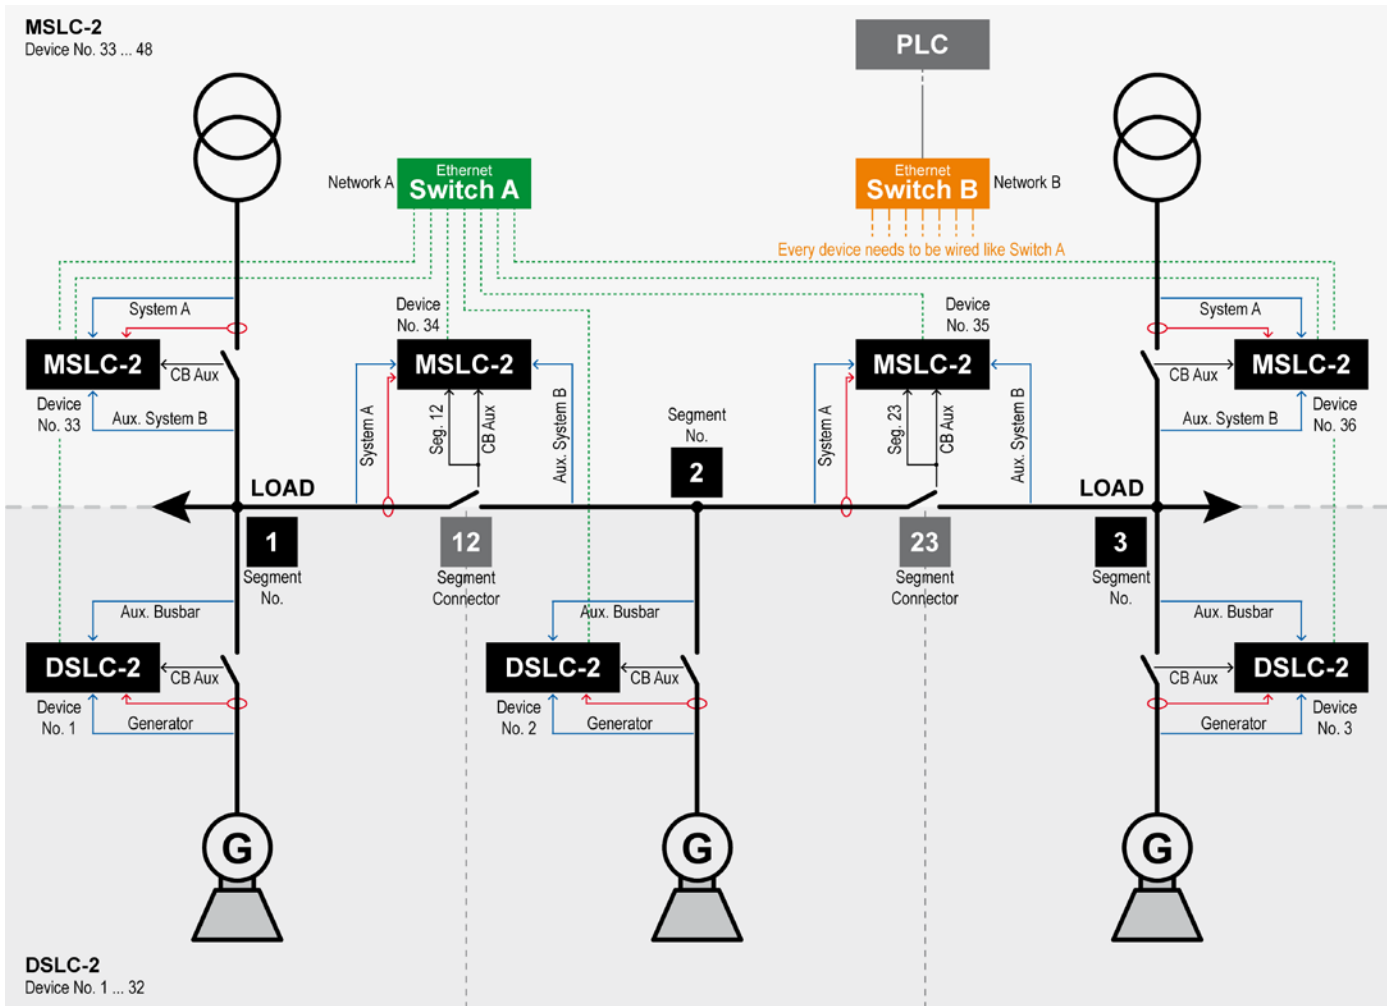

International

Woodward
PO Box 1519
Fort Collins CO, USA
80522-1519
1000 East Drake Road
Fort Collins CO 80525
Ph: +1 (970) 482-5811
Fax: +1 (970) 498-3058

Europe

Woodward GmbH
Handwerkstrasse 29
70565 Stuttgart, Germany
Ph: +49 (0) 711 789 54-0
Fax: +49 (0) 711 789 54-100
email: stgt-info@woodward.com

Distributors & Service

Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

www.woodward.com/power

For more information contact:

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to
stgt-doc@woodward.com

© Woodward


All Rights Reserved

37493C - 2011/06/Stuttgart

TOOLKIT CONFIGURATION SOFTWARE

Woodward's ToolKit Software provides the DSLC-2™ Home Page shown below. ToolKit provides user friendly configuration, commissioning assistance, displays all operating modes, and the over-view pages show what other controls the DSLC-2™ is communicating with.

Note: The menu tree illustrated on the left side is similar to the original DSLC™ structure.

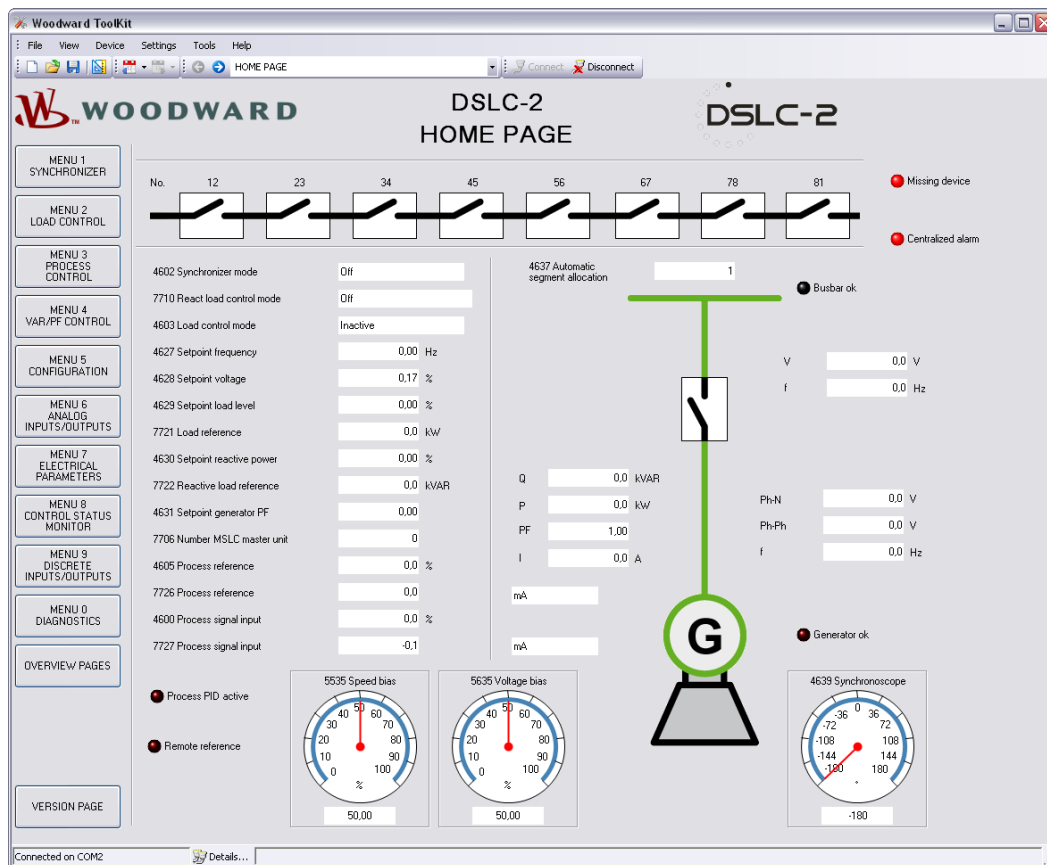

FEATURES OVERVIEW

I/Os	DSL-2	MSLC-2
Discrete inputs	23	23
Relay outputs	12	12
Analog inputs	3	3
Analog outputs	2	-
RS-232 Interface	1	1
RS-485 Interface	1	1
Ethernet Interfaces (10/100 Mbit/s)	2	2
LED 1	CPU OK	CPU OK
LED 2	Sync Enable	Sync Enable
Listings/Approvals		
UL / cUL Listing	✓	✓
GOST-R & CSA	✓	✓
LR & ABS Marine	✓	✓
CE Marked	✓	✓

PART NUMBERS

DSL-2		MSLC-2	
1A CT inputs	5A CT inputs	1A CT inputs	5A CT inputs
P/N 8440-1978	P/N 8440-1878	P/N 8440-1977	P/N 8440-1877
Accessories			
Spare connector kit - P/N 8923-1806			