



GCP-30 Series

Genset Control Package

Mains & Generator Protection & Control

APPLICATIONS

The GCP-30 Series genset control is designed to provide total control for medium sized to large applications with multiple gensets.

A network of the compact, versatile GPC-30 controls is capable of controlling up to **14** gensets with automatic sequencing. Load management features include automatic base loading/peak shaving, import/export control and emergency power/back up power generation.

The GCP-31 has logic for one circuit breaker and the GCP-32 has logic for two circuit breakers including open/closed transition.

Fully integrated communication to engine ECUs including [via CAN bus] standard SAE J1939, Deutz EMR, Scania S6, mtu MDEC; [via RS232] Caterpillar CCM to EMCP-II, and ECM.

DESCRIPTION

Features

- True RMS 8× voltage (generator/busbar/mains)
- True RMS 4× current (generator/mains)
- Start/stop sequence for Diesel/Gas engines
- Engine pre-glow or purge control
- Battery voltage monitoring
- Speed control with overspeed monitoring
- Idle speed mode operation
- kWh/operation hours/start/maintenance counter
- Load dependent start/stop for up to **14 generators**
- Configurable trip/control set points
- Configurable delays for each protection/alarm
- Magnetic/switching Pickup input
- 16 configurable discrete alarm inputs
- 7 configurable/programmable relays
- Two-line LC display
- Synchroscope
- Push-buttons for direct control
- CAN bus communication
- Multi level password protection
- Language manager (English/German switchable)

DESCRIPTION (continued)

Protection ANSI

- 3/4-line measurements
- Mains**
 - Over-/undervoltage (59/27)
 - Over-/underfrequency (81O/U)
 - Phase/vector shift (78)
- Generator**
 - Over-/undervoltage (59/27)
 - Over-/underfrequency (81O/U)
 - Overload (32)
 - Reverse/reduced power (32R/F)
 - Load imbalance (46)
 - Time-overcurrent (TOC) (50)

Controller (all versions)

- Speed/frequency/real power
- Voltage/power factor cosphi
- Mains import/export power
- Load/var sharing for up to **14 generators**

Controller (GCP-31)

- Synchronizer for 1 CB
- Isolated operation
 - Softloading
 - Mains parallel operation

Controller (GCP-32)

- Synchronizer for 2 CB
- same as GCP-31 plus following
 - Open transition (break-before-make)
 - Closed transition (make-before-break)

Special (Version dependent)

- 2 configurable analog outputs (0/4 to 20 mA)
- Generator real power setpoint via 0/4 to 20 mA
- Mains import/export power via 0/4 to 20 mA
- Discrete outputs raise/lower for n/f/V/P/Q
- Analog outputs raise/lower for n/f/V/P/Q
- PWM outputs raise/lower for n/f/P
- 7 conf. analog measuring inputs (0/4 to 20 mA, Pt100, VDO)
- Coupling to LS 4 (GCP-31 only; for details see product specification 37167)
- Event recorder with real time clock





- **J1939** (Scania S6, Deutz EMR), mtu **MDEC**, and CAT **CCM** (EMCP-II, and ECM) coupling
- AMF auto start/stop
- Complete engine, generator, and mains protection and controller in one unit
- True RMS sensing of generator, busbar and mains voltage as well as generator and mains current
- Synchronization for one/two breakers
- Load management-automatic base load/peak shaving, import/export power control, automatic sequencing
- Load/var sharing for up to **14 generators** incl. auto start/stop
- Counters for kWh, engine starts, operating hours, maintenance call
- Freely configurable discrete and analog alarm inputs
- Freely configurable relay and analog outputs
- PC and front panel configurable
- CAN bus based communication
- CE marked
- UL/cUL Listed

SPECIFICATIONS (for more see manual 37239)

Accuracy	Class 1	
Power supply.....	12/24 Vdc (9.5 to 32 Vdc)	
Intrinsic consumption	max. 20 W	
Ambient temperature.....	-20 to 70 °C	
Ambient humidity.....	95 %, non-condensing	
Voltage Rated (Vrated):	[1] 69/120 Vac	or [4] 231/400 Vac
UL:	[1] max. 86/150 Vac	or [4] max. 173/300 Vac
Setting range (sec.) star:	[1] 50 to 125 Vac	or [4] 50 to 480 Vac
Setting range (sec.) delta:	[1] 50 to 114 Vac	or [4] 50 to 380 Vac
Setting range (prim.):	0.050 to 65.000 kVac	
Measuring frequency.....	50/60 Hz (40 to 70 Hz)	
Linear measuring range up to	1.3×Vrated	
Input resistance.....	[1] 0.21 MΩ, [4] 0.7 MΩ	
Max. power consumption per path.....	< 0.15 W	
Current (rated values; Irated).....	[../1]/1 A	or [../5]/5 A
Current-carrying capacity.....	Igen = 3.0×Irated	
	Imains = 1.5×Irated	
Load	< 0.15 VA	
Rated short-time current (1 s)	[../1] 50×Irated, [../5] 10×Irated	
Discrete inputs	isolated	
Input range.....	12/24 Vdc (6 to 32 Vdc)	
Input resistance.....	approx. 6.8 kΩ	
Analog inputs	freely scaleable	
Type	0/4 to 20 mA, Pt100, VDO	
Resolution	10 Bit	

Relay outputs	potential free
Contact material	AgCdO
Load (GP).....	2.00 Aac@250 Vdc
	2.00 Adc@24 Vdc / 0.36 Adc@125 Vdc / 0.18 Adc@250 Vdc
Pilot duty (PD).....	B300
	1.00 Adc@24 Vdc / 0.22 Adc@125 Vdc / 0.10 Adc@250 Vdc
Analog outputs	isolated
Type	0/4 to 20 mA, freely scaleable
Resolution	8/12 Bit (depending on model)
Max. load 0/4-20 mA	500 Ω
Insulating voltage	1,500 Vdc
Housing	Type APRANORM DIN 43 700
Dimensions	144×144×118 mm
Front cutout	138[+1.0]×138[+1.0] mm
Connection	screw/plug terminals depending on connector 1.5 mm ² or 2.5 mm ²
Front.....	insulating surface
Protection system	with proper installation
	Front..... IP42
	(sealed IP54; gasket kit = P/N 8923-1039)
	Back..... IP21
Weight	depending on version, approx. 1,000 g
Disturbance test (CE).....	tested according to applicable EN guidelines
Listings	UL/cUL listed (voltages up to 300 Vac)


DIMENSIONS

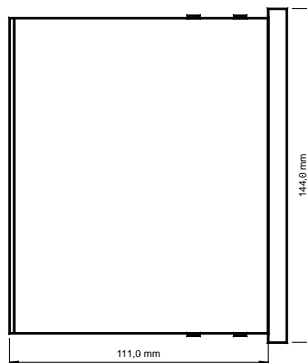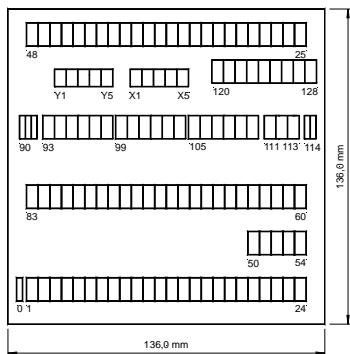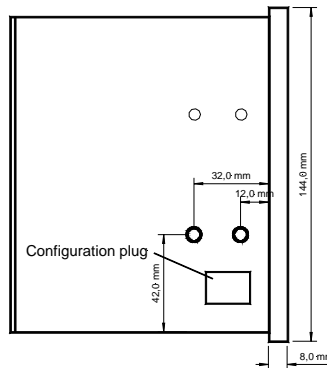


2002-11-21 | GCP30-AMG2 Dimensions g2ww-4702-ab.skf

APPLICATIONS

Typical application for the GCP-32 (GCP-31 same but without MCB)

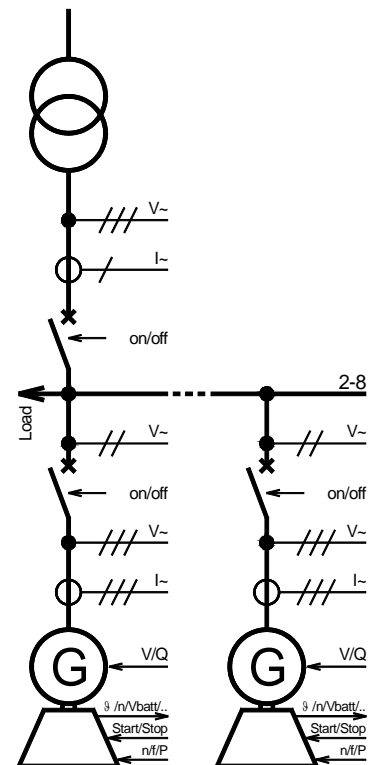

WIRING DIAGRAM (example: GCP-32/XPO+SC06; for more see manual 37239)

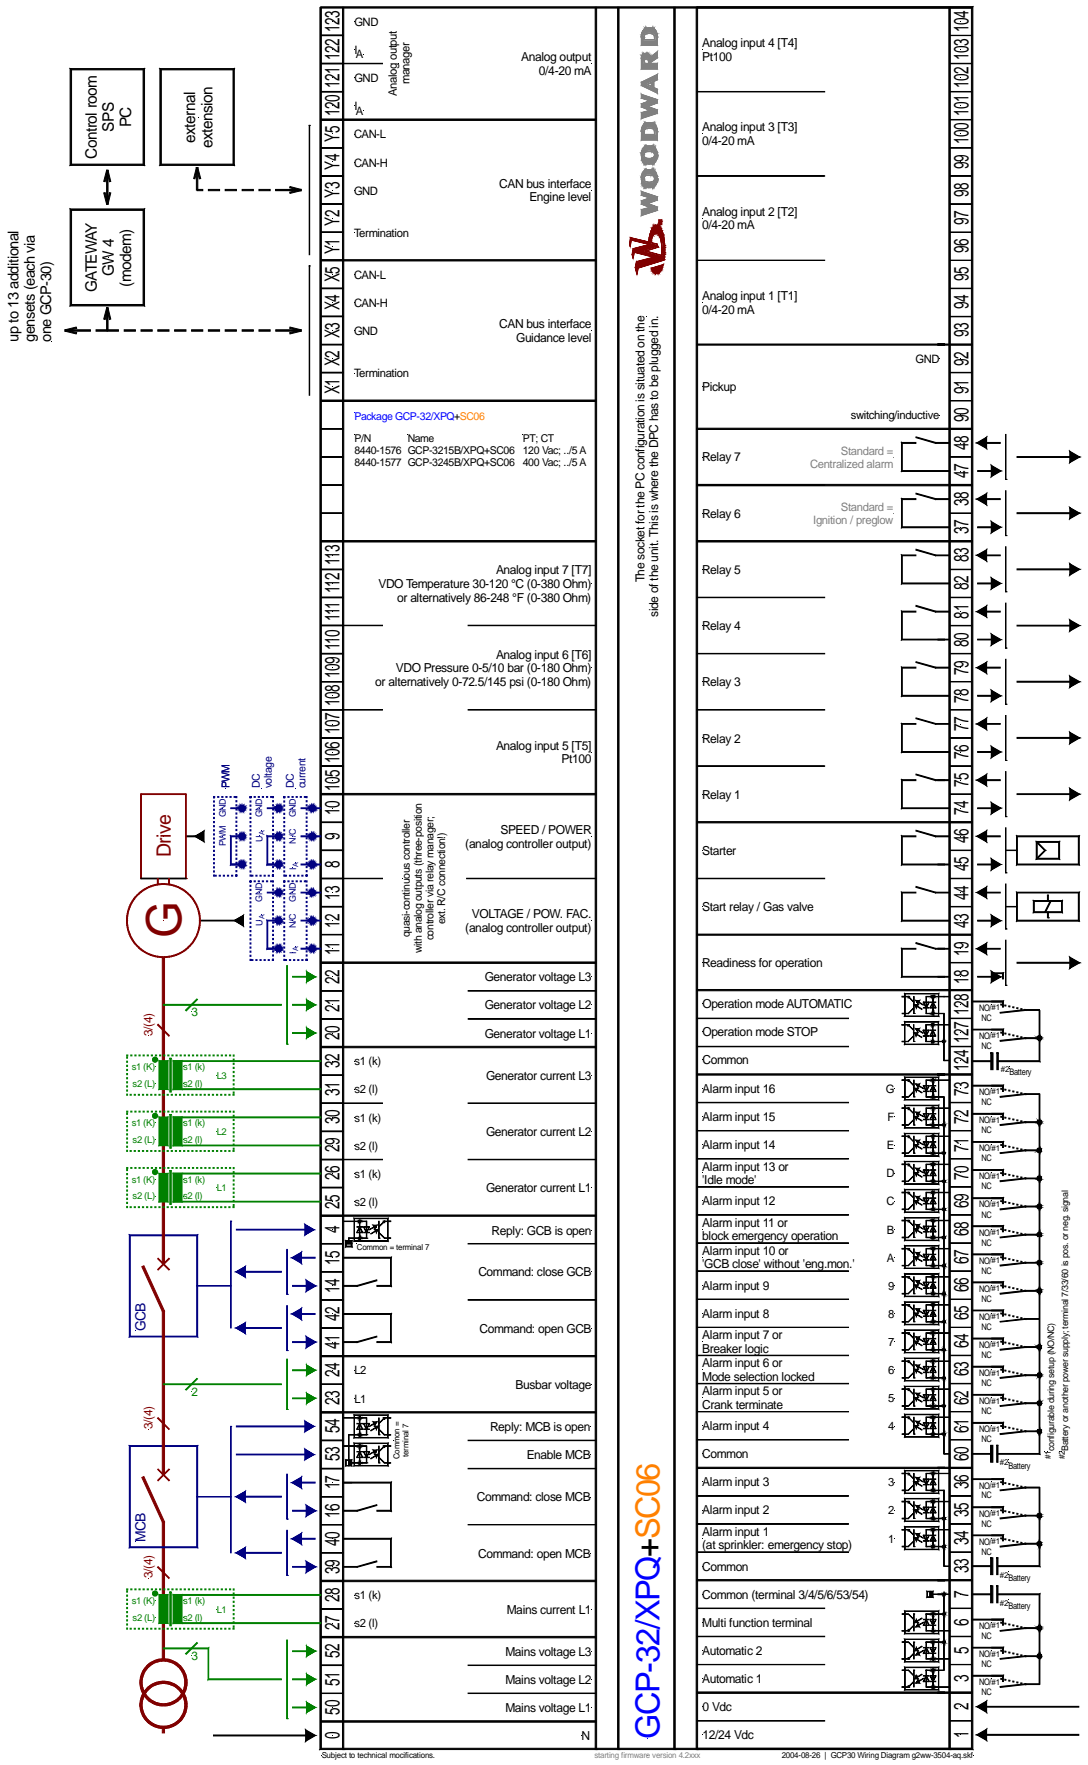

WOODWARD

The socket for the PC configuration is situated on the side of the unit. This is where the DPC has to be plugged in.

GCP-32/XPO+SC06

International
 Woodward Industrial Controls
 PO Box 1519
 Fort Collins CO, USA
 80522-1519
 1000 East Drake Road
 Fort Collins CO 80525
 Ph: +1 (970) 482-5811
 Fax: +1 (970) 498-3058

Europe
 Woodward Governor Company
 Leonhard-Reglerbau GmbH
 Handwerkstrasse 29
 70565 Stuttgart, Germany
 Ph: +49 (0) 711-789 54-0
 Fax: +49 (0) 711-789 54-100

Distributors & Service
 Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

Corporate Headquarters
 Rockford IL, USA
 Ph: +1 (815) 877-7441

www.woodward.com/smart-power

For more information contact:

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

© Woodward Governor Company

All Rights Reserved

03240E - 04/10/S

FEATURES OVERVIEW

GCP-30 Series Genset Control	GCP-31						GCP-32					
	Package	BPD	BPQ	XPD	XPQ	XPO+SB03	XPO+SC06	BPD	BPQ	XPD	XPQ	XPO+SB03
Control												
Breaker control logic	1	1	1	1	1	1	2	2	2	2	2	2
Synchronization	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Isolated single-unit operation	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
AMF (auto mains failure operation)			✓ #1	✓ #1	✓ #1	✓ #1	✓	✓	✓	✓	✓	✓
Stand-by operation	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak load op. (auto start/stop)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Mains parallel operation	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Open transition (break-before-make)							✓	✓	✓	✓	✓	✓
Closed transition (make-before-break)							✓	✓	✓	✓	✓	✓
Softloading	✓ #2	✓ #2	✓ #2	✓ #2	✓ #2	✓ #2	✓	✓	✓	✓	✓	✓
Accessories												
Start/stop logic for Diesel/Gas engines	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
kWh counter	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Operating hours/start/maintenance counter	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Configuration via PC #3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Event recorder, real time clock			50	50	50	50			50	50	50	50
Language manager (English/German)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Protection												
Generator: voltage/frequency	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Mains: volt./freq./phase shift	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Generator: overload/load imbalance	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Generator: reverse/reduced power	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Generator: time-overcurrent (TOC)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Controller												
Discrete raise/lower: n/f & P	✓	✓ #4	✓	✓ #4	✓ #4	✓ #4	✓	✓ #4	✓	✓ #4	✓ #4	✓ #4
Discrete raise/lower: V & Q	✓	✓ #4	✓	✓ #4	✓ #4	✓ #4	✓	✓ #4	✓	✓ #4	✓ #4	✓ #4
Analog raise/lower: n/f & P #4		✓		✓	✓	✓		✓		✓	✓	✓
Analog raise/lower: V & Q #4		✓		✓	✓	✓		✓		✓	✓	✓
PWM raise/lower: n/f & P #4		✓		✓	✓	✓		✓		✓	✓	✓
Mains import/export power via 20 mA			✓	✓	✓	✓			✓	✓	✓	✓
Mains import/export power control	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Load-dependent start/stop	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Active power setpoint 0/4-20 mA #5			✓	✓	✓	✓			✓	✓	✓	✓
Load/var sharing for 14 generators	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
I/O's												
Magnetic/switching Pickup	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Discrete alarm inputs (configurable)	16	16	16	16	16	16	16	16	16	16	16	16
Relay outputs (configurable)	7	7	7	7	7	7	7	7	7	7	7	7
Analog inputs (configurable) #5			7	7	7	7			7	7	7	7
Analog outputs 0/4 to 20 mA (config.)			2	2	2	2			2	2	2	2
External operation mode selection via DI			✓	✓	✓	✓			✓	✓	✓	✓
CAN bus comm., Guidance level #6	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CAN bus comm., Engine level #7						✓						✓
RS232 comm., Engine level #8					✓	✓					✓	✓
LS 4 - Circuit Breaker Control #9			✓	✓	✓	✓						
Listings/Approvals												
CE Marked	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
UL/cUL Listed	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Part numbers P/N												
Measuring inputs 120 Vac, ..1 A (8440-	-1548	-1607	-1552	-1556			-1564	-1611	-1568	-1572		-1688
Measuring inputs 400 Vac, ..1 A (8440-	-1549	-1608	-1553	-1557		-1716	-1565	-1612	-1569	-1573		-1664
Measuring inputs 120 Vac, ..1/5 A (8440-	-1550	-1609	-1554	-1558	-1562	-1560	-1566	-1613	-1570	-1574	-1578	-1576
Measuring inputs 400 Vac, ..1/5 A (8440-	-1551	-1610	-1555	-1559	-1563	-1561	-1567	-1614	-1571	-1575	-1579	-1577

#1 External unit LS 4 necessary #2 In isolated parallel operation with min. 2 gensets in parallel #3 Cable incl. software necessary (DPC)
 #4 +/-20 mA and +/-10 Vdc and PWM signal (type and range configurable); bias/discrete setpoint via relay manager
 #5 [T1]-[T3] = 0/4 to 20 mA, [T4]/[T5] = Pt100, [T6] = VDO 0 to 180ohm, [T7] = VDO 0 to 380ohm; function of 20 mA inputs is configurable between alarm input, remote setpoint value for generator real power, mains import/export real power measuring value; others upon request
 #6 Remote monitoring, control, configuration (GW 4 could be used for several interfaces)
 #7 CAN bus connection to IKD1, mtu MDEC, Scania EMS/S6, CAN SAE J1939 and/or ST3 (configurable) #9 External unit LS 4
 #8 RS232 connection via Caterpillar CCM to Caterpillar EMCP-II, and ECM (configurable) (see prod/spec 37167)